



No Hub



No Rewiring



No Setup



No Pairing

THE SIMPLEST SMART SYSTEM



CONTROL



MONITORING



SAVINGS



Mobile As Hub



Voice Control



Mesh-like Network



Remote Control



Rooms and Scenes



Away Detection



Schedule Timers



Password Protection

IF

IF This Then That



Proshare

LINCOGN TECHNOLOGY CO. LIMITED

Unit 315A, 3/F, Enterprise Place, No.5 Science Park West Avenue, Hong Kong Science Park, Shatin, N.T., HK
info@yoswit.com | Tel : (852) 3996 9396 | Fax : (852) 3119 8778 | www.yoswit.com





Do I have neutral wire?

Most Smart Switch

Traditional Switch

Require Neutral Wire

No Neutral Wire

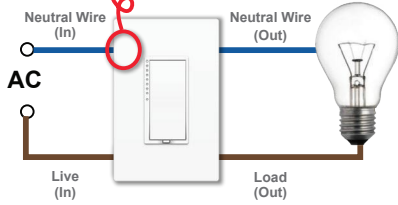

THE ONLY SMART SWITCH SUPPORTS BOTH WITH OR WITHOUT NEUTRAL WIRE

PRODUCT CATALOG

Smart Light Switch

Socket 86



Smart Light Switch - Socket 86

Max Load Current: 6A



Smart 3-way Switch - Socket 86

Max Load Current: 6A



Socket 118



Smart Light Switch - Socket 118

Max Load Current: 6A



Smart 3-way Switch - Socket 118

Max Load Current: 6A



Socket 120



Smart Light Switch - Socket 120

Max Load Current: 6A



Smart 3-way Switch - Socket 120

Max Load Current: 6A



Socket 55



Smart Light Switch - Socket 55

Max Load Current: 6A



Smart 3-way Switch - Socket 55

Max Load Current: 6A



WORLD'S 1ST 3-IN-1 SMART DIMMER SWITCH



Support both with or without neutral wire installation



Support 0/1-10v dimming solutions

UNIVERSAL DIMMING



Support both leading edge and trailing edge dimming

PRODUCT CATALOG

Smart Dimming Solution



YO815d

Smart Dimmer Switch - Socket 86

Max Load Power (TRIAC): 400W
Max Load Current (0/1-10v): 100MA / 50 Bulbs



YO813d

Smart Dimmer Switch - Socket 118

Max Load Power (TRIAC): 400W
Max Load Current (0/1-10v): 100MA / 50 Bulbs



YO811d

Smart Dimmer Switch - Socket 120

Max Load Power (TRIAC): 400W
Max Load Current (0/1-10v): 100MA / 50 Bulbs



YO812d

Smart Dimmer Switch - Socket 55

Max Load Power (TRIAC): 400W
Max Load Current (0/1-10v): 100MA / 50 Bulbs



YO680-D36250-TD

C.C Dimming LED Driver (Triac)

Options: 5~200W
Input Voltage: 100-130v, 220-240v
Match Yoswit, Lutron, Leviton, Legrand, Clipsal, C-Bus and other lighting system



YO680-D12010-TD

C.V Dimming LED Driver (Triac)

Options: 5~200W
Input Voltage: 100-130v, 220-240v
Match Yoswit, Lutron, Leviton, Legrand, Clipsal, C-Bus and other lighting system



YO680-D30350-P-DIM

C.C Dimming LED Driver (0-10v)

Options: 5~200W
Input Voltage: 100-130v, 220-240v
Match Yoswit, Lutron, Leviton, Legrand, Clipsal, C-Bus and other lighting system



YO680-D30350-P-DIM

C.C Dimming LED Driver (0-10v)

Options: 5~200W
Input Voltage: 100-130v, 220-240v
Match Yoswit, Lutron, Leviton, Legrand, Clipsal, C-Bus and other lighting system



YO680-D12008-TD

C.V Dimming LED Driver PWM output

Options: 5~200W
Input Voltage: 100-130v, 220-240v
Match Yoswit, Lutron, Leviton, Legrand, Clipsal, C-Bus and other lighting system



YO619d / YO619v /
YO619

Smart In Wall Module

Options: On/Off, TRIAC, 0/1-10v
Max Load: 10A (On/Off)
400W (TRIAC)
100MA / 50 Bulbs (0/1-10v)



PRODUCT CATALOG

Automatic Shading



YS125



YS145

Smart Curtain 1 Layer / 2 Layers

Track Length (m): ≤ 12

Max. Curtain Weight (kg): 75

Features: Customizable track length and track shape



Smart Blinds

Tube Length (m): ≤ 12

Rated Torque (N.m): 6

Rated Speed (rpm): 28

Features: Customizable tube length and tube shape



YO825k YO845k

Smart Curtain Switch - Socket 86

Max Load Current: 6A / 400W



Smart Curtain Switch - Socket 118

Max Load Current: 6A / 400W



YO821k

Smart Curtain Switch - Socket 120

Max Load Current: 6A / 400W



YO822k

Smart Curtain Switch - Socket 55

Max Load Current: 6A / 400W



Cooker (Double Pole) Switch Series



YO815c

Smart Double Pole Switch - Socket 86

Max Load Current: 20A / 2HP



YO813c

Smart Double Pole Switch - Socket 118

Max Load Current: 20A / 2HP



Smart Outlet Series



YO515eu

Smart Outlet (EU)

Max Load Current: 16A

Power Consumption Measurement

Smart Power Output Lock



YO515uk

Smart Outlet (UK)


Max Load Current: 13A

Power Consumption Measurement

Smart Power Output Lock



Plug & Play Gadgets



YO101i

Smart Universal Remote

Options: Lite / Pro

IR Library: >100k

Power Supply: 3A Battery / USB



YO919

Smart Bulb Adapter

Max Load: 60 watt

Convertible Caps:



B22



E14



E27



YO602eu



YO602uk

Smart Plug

Max Load Current: 10A



YO602us



YO602cn



BLE Modules



Customisable Bluetooth Module

- Mesh Network

- Cloud Connect

- Multiple User Connection

- GATT Profile

- Rebuild Network after Power Lost

- Auto Build Network

- Auto Reform Network

- Feedback Message



Bluetooth 4.2



Bluetooth 5.0

